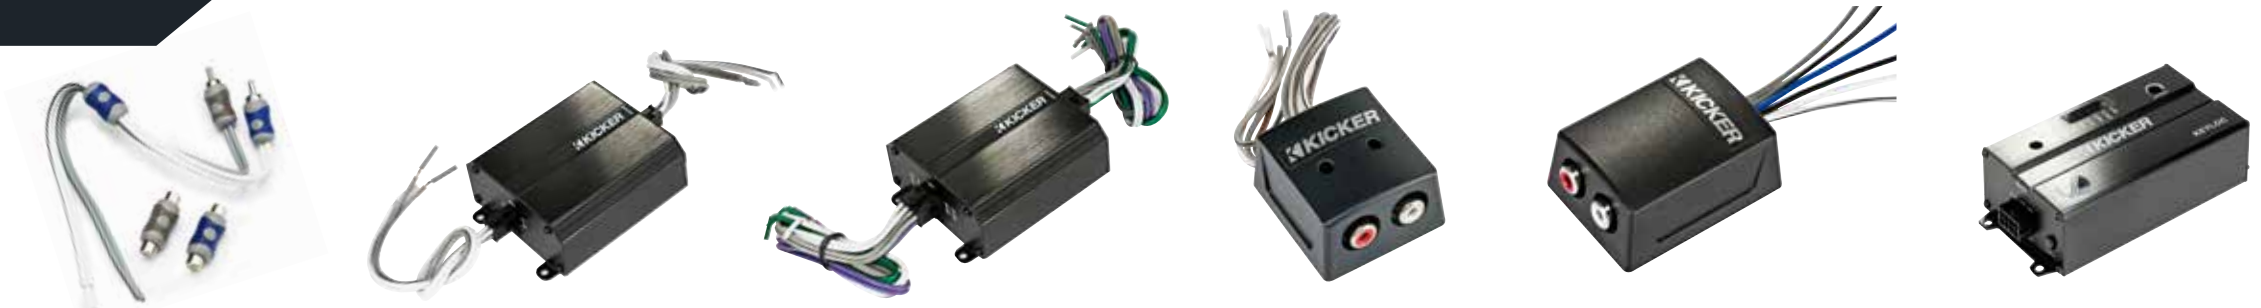


**KICKER****INTEGRATE** COMPONENTS

| Model  | KISL              | KISLOAD2          | KISLOAD4          | KISLOC            | KISLOC2           | KEYLOC                   |
|--|-------------------|-------------------|-------------------|-------------------|-------------------|--------------------------|
| <b>LOC Type</b>                                | PASSIVE           | PASSIVE           | PASSIVE           | PASSIVE           | PASSIVE           | ACTIVE                   |
| <b>Number of Channels</b>                      | 2                 | 2                 | 4                 | 2                 | 2                 | 2                        |
| <b>Maximum Input Wattage (@40Ω)</b>            | Pass thru         | 400 watts/channel | 100 watts/channel | 55 watts/channel  | 55 watts/channel  | 400 watts/channel        |
| <b>Input Clipping Indicators</b>               | -                 | -                 | -                 | -                 | -                 | Left and Right           |
| <b>Maximum Output Voltage</b>                  | Pass thru         | 40 volts          | 20 volts          | 10 volts          | 10 volts          | 10 volts                 |
| <b>DC Offset Trigger</b>                       | -                 | -                 | -                 | -                 | -                 | Input only               |
| <b>Input Load</b>                              | N/A               | 25Ω               | 25Ω               | 60Ω               | 60Ω               | 60Ω                      |
| <b>Input Gain</b>                              | -                 | -                 | -                 | -                 | -                 | Yes                      |
| <b>Output Level Adjust</b>                     | -                 | -                 | -                 | Yes               | -                 | Yes                      |
| <b>Frequency Range at Full Power</b>           | 20 - 20KHz +/-1dB | 20 - 20KHz +/-1dB | 20 - 20KHz +/-1dB | 20 - 20KHz +/-1dB | 20 - 20KHz +/-1dB | 20 - 20KHz +/-1dB        |
| <b>Provides 12 Volt Switched Remote Output</b> | -                 | -                 | -                 | -                 | Yes               | Yes                      |
| <b>Passes DC Offset</b>                        | Yes               | Yes               | Yes               | -                 | -                 | -                        |
| <b>3 Band Frequency Detection</b>              | -                 | -                 | -                 | -                 | -                 | Yes                      |
| <b>Time delay Defeat</b>                       | -                 | -                 | -                 | -                 | -                 | Yes                      |
| <b>All Pass Filter Defeat</b>                  | -                 | -                 | -                 | -                 | -                 | Yes, 3 independent bands |
| <b>Left/Right Level Matching</b>               | -                 | -                 | -                 | Manual            | -                 | Automatic                |
| <b>Auto EQ Correction</b>                      | -                 | -                 | -                 | -                 | -                 | Yes                      |